



HELIOS FTI-2M-0550 | FTI-2M-0800 | FTI-2M-1200

Constructed entirely from stainless steel (AISI 304 or AISI 316) with two side motors.

The "Helios" industrial sieve shaker is very useful in reduced spaces where the reception of material and the unloading of the sieved product are in close proximity.

The installation of these sieve shakers is simply by positioning them at the outlet of discharge chutes, grinding mills, mixers, etc.


It can be supplied on a wheeled support or alone, to be inserted within an installation

Available diameters: $\varnothing$ 550 / $\varnothing$ 800 / $\varnothing$ 1200 mm

INCLUDES:

- > Sieve shaker with motors side.
- > User manual.
- > CE declaration conformity.

3D MOTION

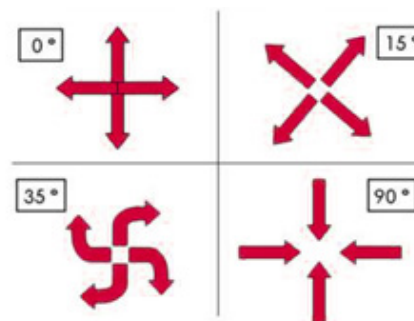


TECHNICAL FEATURES


Model	Voltage	Frequency	Speed	Power	Speed
FTI-2M-0550	400 V	50 Hz	1500rpm	0,17 kW (x2)	1500 rpm
FTI-2M-0800				0,17 kW (x2)	
FTI-2M-1200				0,3 kW (x2)	

TECHNICAL DIMENSIONS

(mm)	FTI-2M-0550	FTI-2M-0800
A	1000	1240
B	$\varnothing$ 120	$\varnothing$ 300
C	$\varnothing$ 200	$\varnothing$ 300
D	515	675

(mm)	FTI-2M-1200
A	1705
B	$\varnothing$ 300
C	$\varnothing$ 300
D	815

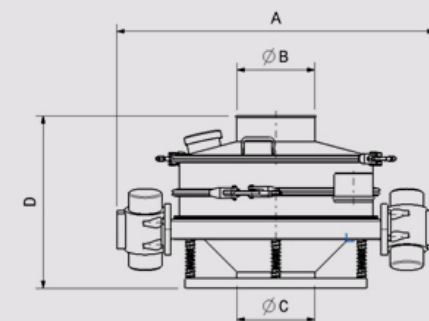

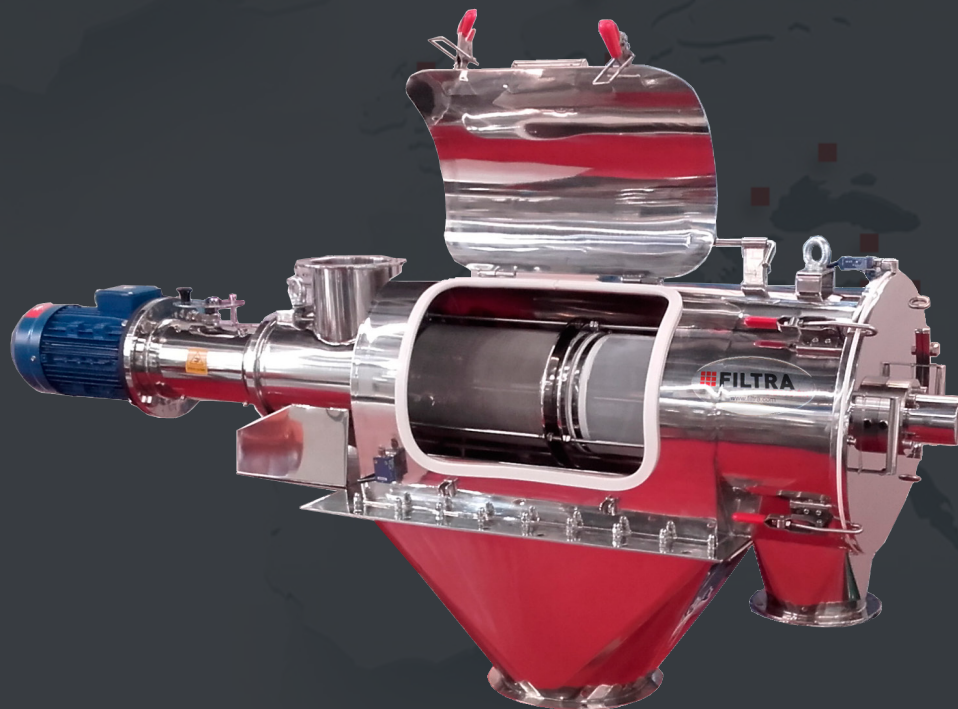

SIEVING FOR LABORATORY AND INDUSTRIAL PROCESSES

FILTRA
VIBRACIÓN

Filtra Vibración S.L

C/ BRONZE, 1-3, P.I. LES GUIXERES
08915 BADALONA (BARCELONA)

filtra@filtra.com
filtra.com